



# MEDIA GATEWAY ALPHA CODES

This document provides the steps necessary to access and apply alpha codes with the MediaGateway module.

- Under Setup using the MediaGateway console, select the **Options** tab

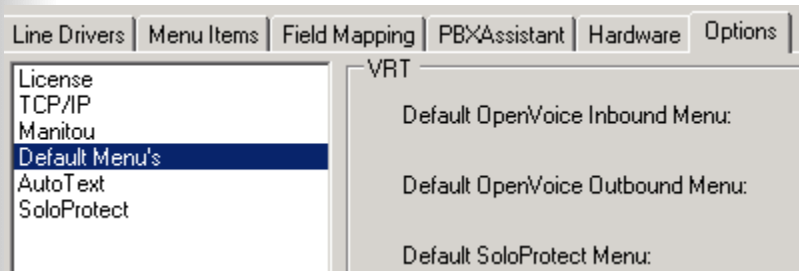

- Click **Default Menu's** from the left-hand side of the screen, then choose an option from the available list for **Alpha Input Model**.

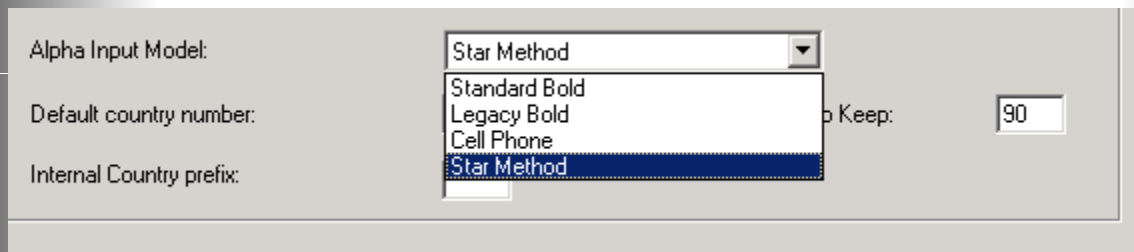

Option Description	Examples	
<b>Standard Bold</b> - Uses an asterisk, "*", then using the telephone keypad representation the user chooses the first digit based on the location of the letter (i.e. 2 references A, B or C, 3 references D, E or F, etc.) and the second digit as the location of the letter in reference to the first.	*21 = A *22 = B	*32 = E *33 = F
<b>Legacy Bold</b> - Uses an asterisk, "*", followed by a two digit number representing the letter. The numbers range from 01 to 26.	*01 = A *02 = B	*03 = C *26 = Z
<b>Star</b> - Uses a series of asterisks, "**", to represent the location of the letter in reference to a single keypad digit and then the location of the letter based on the telephone keypad representation of characters.	*2 = A **2 = B ***2 = C	*3 = D **3 = E
<b>Cell</b> - Always uses an asterisk, "*", to start and then number key on the telephone keypad to represent the digit or character needed:	*2 = 2 *22 = A *3 = 3 *333 = E	*222 = B *2222 = C *33 = D