


# Suspend (Timeout, Hidden)

The `Suspend(Seconds,Unavailable)` command force suspends the alarm event upon receipt of the alarm for the number of seconds defined. The `Unavailable` option, when set, prevents operators from directly pulling the alarm from the alarm queue until the timeout expires.

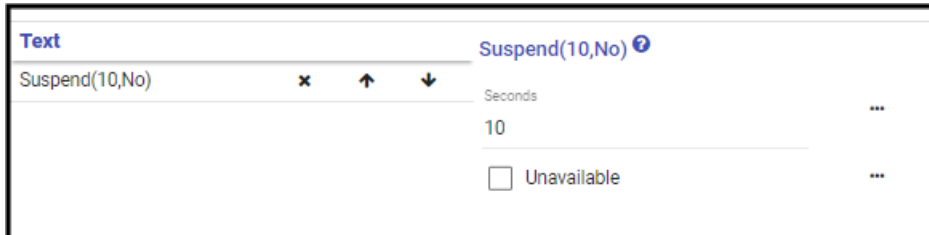

The screenshot shows a configuration window for the `Suspend(10,No)` command. The window has a title bar with the text `Suspend(10,No)` and a help icon. Below the title bar, there is a text input field containing `Suspend(10,No)`. To the right of the input field are three small icons: a close button (x), an up arrow, and a down arrow. Below the input field, there is a label `Seconds` followed by a text input field containing the value `10`. To the right of the `Seconds` label and the `10` input field is a three-dot menu icon. Below the `Seconds` section, there is a checkbox labeled `Unavailable` followed by a three-dot menu icon.

## Command Parameters

- **Seconds** - How long the event suspends prior to being available for alarm processing.
  - **Unavailable** - When selected, prevents operator access until the suspend time completes.
-