


User(ID, Override)

The **UserID(ID,Override)** command applies the defined User ID to the event. Override determines if the event contains a User ID, if this User ID should override the one received.

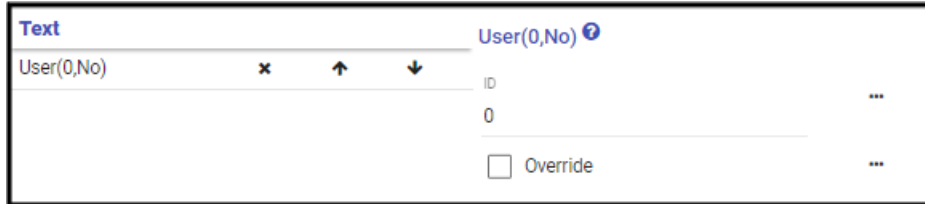

The screenshot shows a configuration window for the 'User(0,No)' command. The window has a title bar with 'Text' on the left and 'User(0,No) ?' on the right. Below the title bar, there is a text input field containing 'User(0,No)'. To the right of the input field are three small icons: a red 'x', an upward-pointing arrow, and a downward-pointing arrow. Below the input field, there is a label 'ID' followed by a text input field containing the value '0'. To the right of the '0' field is a three-dot menu icon. Below the '0' field, there is a checkbox labeled 'Override' followed by another three-dot menu icon.

Command Parameters

- **ID** - Sets the numeric value of the User ID.
 - **Override** - When set, overrides the numeric ID value as the User ID.
-