

## SIMS III for Windows – Error Messages

The following details how to view the error message that can generate in SIMS.

To access this information, go to Edit>Table Maintenance>Messages>Error. (Many of the messages are no longer applicable as they referenced issues in SIMS DOS).

- 0000 (blank)
- 0001 Invalid Function Number!  
An invalid function number has been requested of DOS from the application program (SIMS II).
- 0002 File Not Found!  
The requested file cannot be found. It has been deleted or destroyed.
- 0003 Path Not Found!  
The file path cannot be found and should be considered invalid.
- 0004 Too Many Open Files! (no handles left)  
The application has requested a file handle and no more handles are available. This may be a network problem. Consult SIMS for help.
- 0005 Access Denied!  
The current application has been denied access from the operating system. Usually this means another application has the file opened in an exclusive manner (i.e. someone else is writing to the file).
- 0006 Invalid Handle!  
The current application has provided a file handle number that has been declared invalid by either the operating system or the network.
- 0007 Error Reading the SCHEDULE.DAT File!  
There has been an error while trying to Check the account schedules and No Test timers. This is only normal when upgrading from a demo version to the licensed version.
- 0008 Error Writing the SCHEDULE.DAT File!  
There has been an error while updating the schedule of No Test timers.



### Additional Information:

- This is for reference only-these messages cannot be edited or deleted by the end user.

## SIMS III for Windows – Error Messages (cont.)

**0009 Destination Drive To Small!**

The SIMS program has been required to write to a drive that has an insufficient amount of space available. If you are using a RAM drive, it may be too small for the required task. You may want to contact SIMS technical support for assistance in problem diagnosis.

**0010 ACNTFILE.DAT File Missing!**

The primary Account data file is not present on the disk drive. The error may be caused by operating the program from other than the SIMS II directory.

The program will not operate properly without this file present. You should exit the program and correct the error before continuing.

**0011 ZONEINFO.DAT File Missing!**

The Zone Information file is not present on the disk drive. The error may be caused by operating the program from other than the SIMS II directory.

The program will not operate properly without this file present. You should exit the program and correct the error before continuing.

**0012 CONTACTS.DAT File Missing!**

The Contact List data file is not present on the disk drive. The error may be caused by operating the program from other than the SIMS II directory.

The program will not operate properly without this file present. You should exit the program and correct the error before continuing.

**0013 REC-LOCK.DAT File Missing!**

The Record Locking data file is not present on the disk drive. The error may be caused by operating the program from other than the SIMS II directory.

The program will not operate properly without this file present. You should exit the program and correct the error before continuing.

**0014 RINVOICE.DAT File Missing!**

The Recurring Invoice data file is not present on the disk drive. The error may be caused by operating the program from other than the SIMS II directory.

The program will not operate properly without this file present. You should exit the program and correct the error before continuing.

**0015 EQUIPMNT.DAT File Missing!**

The Equipment List data file is not present on the disk drive. The error may be caused by operating the program from other than the SIMS II directory.

The program will not operate properly without this file present. You should exit the program and correct the error before continuing.

## SIMS III for Windows – Error Messages (cont.)

- 0016 ACNTFILE.IDX File Missing!  
The index for the account data cannot be loaded or is missing. If you get this message please check for this file and if there then it may be locked by your network.  
The program will not operate properly without this file present. You should exit the program and correct the error before continuing.
- 0017 DOS Share is NOT Loaded!  
The SIMS II is configured for Networking, but DOS share has not been loaded. Please check the AUTOEXEC.BAT file and make sure that SHARE is included.
- 0018 Signal Processing is too Slow!  
More than fifty events are waiting to be processed. It would appear that your network <or> computer are running too slow for the amount of signals being received. Please take corrective action as soon as possible.
- 0019 (blank)
- 0020 LPT1 Printer Error!  
The LPT1 Printer is in an error condition. Make sure the printer select light is on and if so then check for a loose cable and adequate paper supply. After correction of the error place the printer back in operation. Note that some hardware configurations do not return the proper printer error (e.g., the printer may be turned off).
- 0021 LPT1 Printer Input/Output Error!  
The LPT1 Printer has returned an Input / Output Error. Please move the paper in the printer to the top of the page and turn the power off for about five seconds and then back on. This should clear the error but if not contact your hardware representative. Note that some hardware configurations do not return the proper printer error (e.g., the printer may be turned off).
- 0022 LPT1 Printer Not Selected!  
The LPT1 Printer is not currently selected. First, check the printer select indicator, and if it is not on press the select button on the printer. If the problem continues contact your hardware representative. Note that some hardware configurations do not return the proper printer error (e.g., the printer may be turned off).
- 0023 LPT1 Printer is Out Of Paper!  
The LPT1 Printer has returned an Out of Paper Error. First verify that the printer is out of paper and if necessary load new paper into the printer. Consult your printer manual for instructions on paper loading. Note that some hardware configurations do not return the proper printer error (e.g., the printer may be turned off).

## SIMS III for Windows – Error Messages (cont.)

- 0024 LPT1 Printer is Busy!  
The LPT1 Printer has returned a Busy Signal Message. Please set your printer to the top of the page and turn the power off and back on. This should clear the error, but if not contact your hardware representative. Note that some hardware configurations do not return the proper printer error (e.g., the printer may be turned off).
- 0025 LPT2 Printer Error!  
The LPT2 Printer is in an error condition. Make sure the printer select light is on and if so then check for a loose cable and adequate paper supply. After correction of the error place the printer back in operation. Note that some hardware configurations do not return the proper printer error (e.g., the printer may be turned off).
- 0026 LPT2 Printer Input/Output Error!  
The LPT2 Printer has returned an Input / Output Error. Please move the paper in the printer to the top of the page and turn the power off for about five seconds and then back on. This should clear the error but if not contact your hardware representative. Note that some hardware configurations do not return the proper printer error (e.g., the printer may be turned off).
- 0027 LPT2 Printer Not Selected!  
The LPT2 Printer is not currently selected. First, check the printer select indicator, and if it is not on press the select button on the printer. If the problem continues contact your hardware representative. Note that some hardware configurations do not return the proper printer error (e.g., the printer may be turned off).
- 0028 LPT2 Printer is Out Of Paper!  
The LPT2 Printer has returned an Out of Paper Error. First verify that the printer is out of paper and if necessary load new paper into the printer. Consult your printer manual for instructions on paper loading. Note that some hardware configurations do not return the proper printer error (e.g., the printer may be turned off).
- 0029 LPT2 Printer is Busy!  
The LPT2 Printer has returned a Busy Signal Message. Please set your printer to the top of the page and turn the power off and back on. This should clear the error, but if not contact your hardware representative. Note that some hardware configurations do not return the proper printer error (e.g., the printer may be turned off).
- 0030 LPT3 Printer Error!  
The LPT3 Printer is in an error condition. Make sure the printer select light is on and if so then check for a loose cable and adequate paper supply. After correction of the error place the printer back in operation. Note that some hardware configurations do not return the proper printer error (e.g., the printer may be turned off).

## SIMS III for Windows – Error Messages (cont.)

- 0031 LPT3 Printer Input/Output Error!  
The LPT3 Printer has returned an Input / Output Error. Please move the paper in the printer to the top of the page and turn the power off for about five seconds and then back on. This should clear the error but if not contact your hardware representative. Note that some hardware configurations do not return the proper printer error (e.g., the printer may be turned off).
- 0032 LPT3 Printer Not Selected!  
The LPT3 Printer is not currently selected. First, check the printer select indicator, and if it is not on press the select button on the printer. If the problem continues contact your hardware representative. Note that some hardware configurations do not return the proper printer error (e.g., the printer may be turned off).
- 0033 LPT3 Printer is Out Of Paper!  
The LPT3 Printer has returned an Out of Paper Error. First verify that the printer is out of paper and if necessary load new paper into the printer. Consult your printer manual for instructions on paper loading. Note that some hardware configurations do not return the proper printer error (e.g., the printer may be turned off).
- 0034 LPT3 Printer is Busy!  
The LPT3 Printer has returned a Busy Signal Message. Please set your printer to the top of the page and turn the power off and back on. This should clear the error, but if not contact your hardware representative. Note that some hardware configurations do not return the proper printer error (e.g., the printer may be turned off).
- 0035 Account is on Credit Hold!  
Your company has placed this account on credit hold. Please contact the accounting department before any service or cost disbursement measures are taken.
- 0036 Response Unpaid  
Response Unpaid, do not Dispatch Guards
- 0037 Monitoring/Guard Unpaid  
Monitoring and/or Response Unpaid, do not Dispatch Guards.
- 0038 Cancelled for Lack of Payment  
Monitoring and Response Unpaid. This account has been cancelled for lack of payment. Take no action.
- 0039 Credit Hold, Undefined
- 0040 Credit Hold, Undefined
- 0041 Credit Hold, Undefined
- 0042 Credit Hold, Undefined

## SIMS III for Windows – Error Messages (cont.)

- 0043 Credit Hold, Undefined
- 0044 Dealer Access Not Allowed  
Operator has tried to fetch a dealer from an F2 Search screen that would enter a Routine Action mask. Access for Dealer Search allow on entry into Dealer Maintenance.
- 0045 Invalid Daylight Savings Entry  
The valid characters for a Daylight Savings entry are "Y", "N", "1", "2", "3", "4" or "5". See the HELP for entry meanings.
- 0046 Account Data Must be Entered!  
Account data must be entered to allow in the field.
- 0047 Account Contains Zone Redirections  
This account contains zones that have redirections or Sub-Accounts. Please note that changes in this account may have effects on other accounts.
- 0048 SIMS II DSEG CheckSum has Changed!  
THE INTEGRITY OF THE SYSTEM HAS BEEN COMPROMISED. WRITE DOWN THE ERROR NUMBER ABOVE, NOTE THE CIRCUMSTANCES WHEN IT OCCURRED AND EXIT THE PROGRAM. THEN RETURN TO THE PROGRAM.  
The software checks itself for internal errors every second. The last check found an error has occurred that could be caused by either a hardware problem or software error. Contact SIMS, Inc. and provide the information noted above.
- 0049 Restoral Code Matches Alarm Code  
Currently the Restoral code for this zone matches the Alarm Code and this will cause the signal to possibly be misinterpreted as a Restore instead of an alarm.
- 0050 Cancel Code Matches the Alarm Code  
Currently the Cancel code for this zone matches the Alarm Code and this will cause the signal to possibly be misinterpreted as a Restore instead of an alarm.
- 0051 Error Writing to Events.His File  
An attempt has been made to index to the events file into an invalid area. You can assume that the Events.IDX file has an invalid index and must be reindexed.
- 0052 Invalid Double Knock Value  
An attempt has been made to enter and invalid double knock value (Y, N, 1,2,3).
- 0053 Timed Hold Event Active!  
Currently there is an active Timed Event Hold. Exiting the SIMS program at this time will cause the loss of this event. This event must be returned back to the Traffic Display before the SIMS program can be exited.

## SIMS III for Windows – Error Messages (cont.)

- 0054 SIMSRcvr Configuration Error!  
An Error has occurred because and port identifier has been received that does not have a match in the Set Receiver/Modem Selections (C-S-S-R) to enabled signal processing. If this happens during setup, please stop the SIMSRcvr until a matching configuration has been entered into the SIMS II Primary.
- 0055 Account Cannot Be Deleted!  
An Account can not be deleted because it is currently locked and in use by another user.
- 0056 Invalid OUS Time/Date Entry!  
An entry has been made that is incorrect. The ending date may before the starting date; if both on the same date the ending time may before the starting time, etc.
- 0057 This Dispatch has a Backup Account!  
Please note that this account also has a backup account and history may be presented in either account's history. Backup account history can be viewed with Ctrl+F6.
- 0058 Not Currently Used
- 0059 Not Currently Used
- 0060 Alarm Buffer is Full!  
Incoming events have now filled the Alarm Buffer. Pending exception events in the Traffic Display must be completed to accept and process an equal number of additional events from the receivers. If the receiver supports hardware handshaking the Clear to Send and Data Terminal Ready control signals will be dropped to avoid additional information from being input into the system.
- 0061 Receiver Message Buffer is Full!  
Incoming events have now filled the Alarm Buffer. Pending exception events in the Traffic Display must be completed to accept and process an equal number of additional events from the receivers. If the receiver supports hardware handshaking the Clear to Send and Data Terminal Ready control signals will be dropped to avoid additional information from being input into the system.
- 0062 Alarm Buffer /w Descriptions is Full!  
Incoming events have not filled the Alarm Buffer. Pending exception events in the Traffic Display must be completed to accept and process an equal number of additional events from the receivers. If the receiver supports hardware handshaking the Clear to Send and Data Terminal Ready control signals will be dropped to avoid additional information from being input into the system.

## SIMS III for Windows – Error Messages (cont.)

- 0063 Out of Service Fifo is Full!  
An attempt to enter another Out of Service entry into the OUS Fifo has been made, but the fifo is currently full. This may be because memory is low. Consult SIMS, Inc. on this error.
- 0064 Event Messages Fifo is Full!  
An attempt to enter another Event Message (Msg) entry into the CPL Fifo has been made, but the fifo is currently full. This may be because memory is low. Consult SIMS, Inc. on this error.
- 0065 Invalid False Alarm Threshold!  
Valid entries are:       U = Unlimited False Alarms  
                              N = Disable False Alarm Threshold Displays  
                              1-9 = Threshold Value
- 0066 Invalid False Alarm Interval!  
Values range from 1 through 6 or a “N” to disable.
- 0067 Invalid Subscriber Option Entry!  
An invalid Subscriber Option has been entered. Refer to the Help Display for Valid entries.
- 0068 False Alarm Threshold Reached!  
The number of false alarms allowable within the specified time period for the subscriber has been reached. If the signal just received is determined to be a false alarm, the police service may be suspended.
- 0069 Service Suspended!  
Police department service has been suspended on this account. You may need to contact an alternative authority such as a guard service for appropriate response.
- 0070 False Alarm(s) Exceeded!  
The number of false alarms within the specified time period for this account has been exceeded. However, a reinstatement date for the account has not yet been entered that would signal suspension of police department service.
- 0071 Account is on Credit Hold!  
Your company has placed this account on credit hold. Please contact the accounting department before any service or cost disbursement measures are taken.
- 0072 Account was On Test or Out of Service!  
This account has either been On Test or Out of Service (due to equipment malfunction) during the current **calender** day. You should be **advised** that the technician may still be at the site or a service problem may still exist.



## SIMS III for Windows – Error Messages (cont.)

- 0073 Account has Service Work Order Active!  
This account has a service work order currently active and may have a bearing on the action to be taken. To review the work order return to the exception event and strike <F4>.
- 0074 Account Edited has a Backup Account!  
Please note that the account you have just edited has a backup account. Any database modifications that have been done may also have to be done on the backup account also.
- 0075 Write Error On Report to Disk!  
A disk write error has occurred on the destination drive during the writing of the report files. Possibly one of the following conditions has occurred:  
Disk is full;                      Disk is not formatted;                      Disk has a media defect.
- 0076 Trying to Delete an Account /w SWO!  
You are trying to delete an account that has an active Service Work Order. Delete the Work Order first and then delete the account.
- 0077 SIMS II Sentinel Pro is Not Present!  
A test has been made for the **required** SIMS II attachment and it could not be found. You may not process any exception events, generate any LTO/LTC/NOT events. Please contact SIMS for your replacement.
- 0078 SIMS II Program Timeout!  
This version of the SIMS II program has timed out. You may have received an updated version by mail and haven't loaded the update. If you have a mailed copy please load it now. If you receive updates from our BBS service, then download the latest update at this time. You can always check the timeout date from Miscellaneous Function/About SIMS.
- 0079 Not Enough Dynamic Memory Available!  
Your computer has less than the 40 kilobytes of Dynamic Memory required. This can be caused by the AcntFile.Idx <or> Fifo\_\_-x.Dat files being too large <or> insufficient dynamic memory before program load (min about 540KB). If less than the minimum 540KB, please have your computer checked, especially the memory manager, provide more memory. SIMS II will not operate on this computer until this has been done.
- 0080 Time Zone Format Incorrect!  
The time zone format must be entered in a three character method. The first character must be a + <or> - with the second character being a mandatory space character; followed by the third character which represents the actual hour offset.

Entry is the following example format: "+ 2"

## SIMS III for Windows – Error Messages (cont.)

0081 Invalid Entry of Beginning/Ending Time  
You have entered matching beginning and ending dates, but have created a closing time before the opening time. This is an invalid entry!

0082 SIMS II Account Invoices are Full!  
The invoice capacity of this SIMS II has been reached and no further invoices can be entered. Please contact SIMS during normal business hours to increase your invoice capacity.

SIMS, Inc.  
2801 West Parker Road (Suite #5)  
Plano, Texas 75023  
Voice (972) 769-0900  
Fax (972) 612-2440

0083 SIMS II Account Equipment List Full!  
The equipment capacity of this SIMS II has been reached and no further equipment can be entered. Please contact SIMS during normal business hours to increase your equipment list capacity.

SIMS, Inc.  
2801 West Parker Road (Suite #5)  
Plano, Texas 75023  
Voice (972) 769-0900  
Fax (972) 612-2440

0084 Destination File is Currently Open!  
Another terminal has the destination file currently opened and it must be closed before the new file can be written. This is required so a uncorrupted file can be written by the program. If on a Novell you may wish to look at the system monitor to identify the user having the file open, otherwise close and reopen each SIMS workstation until the connection is found.

0085 Can't Set Novell Time  
You have attempted to set the time/date on the primary workstation. When this is done on a Novell the SIMS II will attempt to set the time and date on the Novell file server also. This attempt was unsuccessful. The probable cause is that this login script was not provided with console rights in Novell. Please consult Novell when attempting to set the time on the server console or modifying rights.

0086 Special Note for Out of Service!  
Please note that you are excluding all signals from this account except the Mnemonic that you have entered! This field is helpful when wanting to leave a certain part of the system in service.

## SIMS III for Windows – Error Messages (cont.)

- 0087 No Ending Date has been Entered! -  
Please note that a ending date must be entered or this account will remain out of service indefinitely.
- 0088 Invalid Email Output Protocol  
The protocol selection is invalid and must be reentered.
- 0089 Account is currently On Test  
Please note that this account is currently been placed On Test and no alarms will be processed.
- 0090 Account Number Outside Grp Parameters  
The account number for this account is outside the allowable numbers according to beginning and ending sequences numbers in Dealers Account.
- 0091 (blank)
- 0092 (blank)
- 0093 (blank)
- 0094 (blank)
- 0095 (blank)
- 0096 (blank)
- 0097 (blank)
- 0098 (blank)
- 0099 (blank)
- 0100 (blank)
- 0101 Invalid Account Entry!  
The account number entered for Manual Alarm Entry does not match an existing account.
- 0102 Code Entry Required!  
No Alarm Code was entered during Manual Alarm Entry. Note that an alarm code must be specified.
- 0103 Invalid Drive Selection!  
The Drive Selection entry is invalid or out of range and cannot be processed.

## SIMS III for Windows – Error Messages (cont.)

- 0104 Drive Not Ready!  
The Drive Selection entry is invalid or out of range and cannot be processed.
- 0105 Divide by Zero!  
This error may be encountered if the result of an arithmetic calculation is greater than the value that can be held in the computer's destination register. If the error continues all terminals should exit the program and the system should be reset. If after resetting the system the error continues contact your supervisor immediately.
- 0106 Log-In Incorrect!  
The Operator Initials and ID you have entered are not on file or you have made an error typing the information.

### Demonstration Program Log-In

With the cursor in the Initial's field type: "SIM". Then the cursor will automatically move to the ID area where you should type: "002". Then strike <F10> to log-in.

- 0107 Insufficient Access Level!  
The function or activity you have requested requires an access level higher than you currently have. Consult the System Administrator to upgrade your access level if you use this function as part of your normal duties.
- 0108 Work Order Already Exists!  
A Service Work Order is currently pending for this account. Either update the currently pending work order to include the new service information or complete the previously generated work order and generate a new one.
- 0109 Error Writing Work Order!  
An error when writing the work order information to disk has occurred. This may indicate a media defect on the drive itself. If the error continues contact your hardware representative.
- 0110 Wrong Password!  
The System Administration password you have entered is incorrect or you have made an error typing the password.

### Demonstration Program Password

In the password field type: "12345678". Then strike <F10>.

## SIMS III for Windows – Error Messages (cont.)

- 0111 Control Unit Help Not on File!  
The control type entered for the account does not match any existing type on file. Therefore, no help for the control unit can be presented for assistance. Control Unit information is entered in the "Control Unit" selection found in the Account Maintenance Menu.
- 0112 Invalid Passcard Entry!  
The passcard entered is not valid for the current account. You may view the account's passcard entries while in an exception event by striking <F7>. Also, the default operator passcard of "0000" may be used.
- 0113 No Account Match Found!  
An attempt to generate a report without any account matches has occurred. Make sure valid parameters are being used.
- 0114 (blank)
- 0115 Invalid Time Entry!  
An attempt has been made to enter a time value that is incorrect. Valid time entries must observe the following syntax where "HH" is the two digit hours in military time and "MM" is the two digit minutes amount. Note that a colon (:) must be present and separate the hours and minutes.  
HH:MM
- 0116 Invalid Time Entry!  
An attempt has been made to enter a time value that's incorrect. A valid time entry must observe the following syntax where "HH" is the hours in military time, "MM" is the two digit minutes and "SS" is the seconds. Note that a colon (:) must be present and separate hours, minutes and seconds.  
HH:MM:SS
- 0117 Invalid Date Entry!  
An attempt has been made to enter a date value that's incorrect. A valid date entry must observe the following syntax where "MM" is the two digit month and "DD" is the two digit days amount. Note that a slash (/) must be present and separate the month and day.  
MM/DD
- 0118 Invalid Date Entry!  
An attempt has been made to enter a date value that's incorrect. A valid date entry must observe the following syntax where "MM" is the two digit month, "DD" is the two digit days and "YY" is the tens and ones digits of the year (e.g. 1991 is "91"). Note a slash (/) must be present to separate the month, day and year.  
MM/DD/YY

## SIMS III for Windows – Error Messages (cont.)

- 0118 Invalid Date Entry!  
An attempt has been made to enter a date value that's incorrect. A valid date entry must observe the following syntax where "MM" is the two digit month, "DD" is the two digit days and "YY" is the tens and ones digits of the year (e.g. 1991 is "91"). Note a slash (/) must be present to separate the month, day and year. MM/DD/YY
- 0119 Account Does Not Exist!  
The entered account does not exist in the database.
- 0120 No Match Found!  
A parameter has been entered that no existing account in the database matches.
- 0121 Invalid Day Entry!  
An illegal or invalid entry has been entered for a day of week entry.
- 0122 Requires Yes or No Response!  
This field requires a "Y" or "N" response to be entered.
- 0123 Invalid Opening Type  
An attempt has been made to enter an invalid opening type.
- 0124 Invalid Number!  
An invalid two digit number has been entered.
- 0125 Out of Service Error!  
An error has occurred during the reading of the account header in the Out of Service file.
- 0126 Invalid Number!  
An attempt to enter an invalid three digit number has been made.
- 0127 Invalid Number!  
An attempt to enter an invalid four digit number has been made.
- 0128 Invalid Number!  
An attempt to enter an invalid one digit number has been made,
- 0129 Account Not Present!  
A Sub Control account number has not been entered on the zones page of account maintenance.
- 0130 Message Not Found!  
The Message or event type entry is not present in the master list of event types. These are defined by the system administrator in the "Event Priority Levels" selection of the System Administration Menu.

## SIMS III for Windows – Error Messages (cont.)

- 0131 Interval Type Not Entered!  
An interval period has been entered yet no entry for Minutes, Hours or Days has been specified.
- 0132 Select Subscriber or Group!  
A Subscriber or Group entry (“S” or “G”) has been specified.
- 0133 Report Interval Not Entered!  
A Daily, Weekly, Bimonthly or Monthly (“D” for Daily, “W” for Weekly, “B” for Bimonthly or “M” for Monthly) interval has not been specified.
- 0134 Report Language Not Specified!  
An English, Spanish or French (“E” for English, “S” for Spanish or “F” for French) entry has not been specified.
- 0135 Report Routing Not Entered!  
A Facsimile, Mail, Upload or Download (“F” for Facsimile, “M” for Mail, “U” for Upload or “D” for Download) entry used to select report routing has not been specified.
- 0136 Invalid Number!  
An attempt to enter an invalid five digit number has been made.
- 0137 Invalid Drive or Path Specified!  
An invalid drive or path description has been entered.
- 0138 Account Group Not Found!  
An account group (or dealer) entry has been entered that doesn’t exist.
- 0139 Invalid Report Interval!  
An Immediate, Daily, Weekly, Bimonthly or Monthly (“I” for Immediate, “D” for Daily, “W” for Weekly, “B” for Bimonthly or “M” for Monthly) entry has not been made.
- 0140 Invalid Report Routing  
An entry rather than “F” for Facsimile, “U” for Upload, “D” for Download or invalid printer number (1 to 4) has been attempted.
- 0141 Invalid Report Routing!  
An entry other than “S” for Subscriber, “G” for Group, “A” for Authority or “O” for Other has been entered.
- 0142 Account Found!  
An account has been found yet it shouldn’t have been.
- 0143 Invalid Entry!  
An invalid priority level entry has been entered. Your entries are limited to 1 through 9 or “A” to log automatically the event type.

## SIMS III for Windows – Error Messages (cont.)

- 0144 Invalid Entry!  
An entry for event response display is invalid. Possible entries consist of "R" for Routine Action, "P" for Priority Action, "W" for Service Work Order, "S" for System Reminder and an "F" for Follow Up.
- 0145 Invalid Drive Path!  
The current entry for the specified drive path is invalid or does not exit.
- 0146 Invalid Entry!  
The Local or Toll call specifier is invalid. Only "L" for Local or "T" for Toll (long distance) entries are allowed.
- 0147 Account Number in Use!  
An attempt to use an account number that already exists has been made. You must use a different account number or first delete the original account before continuing.
- 0148 File Cannot be Found!  
The history file you have selected cannot be located on the disk drive.
- 0149 Invalid Entry!  
An entry other than one recognized by the modem has been entered. Please limit your characters to the following:
- |         |             |       |        |
|---------|-------------|-------|--------|
| Numbers | Parenthesis | Comma | Hyphen |
|---------|-------------|-------|--------|
- 0150 Ten Digit Dialing Required!  
A minimum of ten digit dialing is required for all dialing. Please include the area code in this phone number.
- 0151 (blank)
- 0152 (blank)
- 0153 (blank)
- 0154 (blank)
- 0155 (blank)
- 0156 (blank)
- 0157 (blank)
- 0158 (blank)



## SIMS III for Windows – Error Messages (cont.)

- 0159 Backup System for Account!  
An attempt to place an account that has a backup system defined you may need to also place the backup system out of service if work will also be performed on it's transmitter.
- 0160 Window Memory Allocation Error!  
An error has occurred while attempting to allocate memory for a window function. Probably there is insufficient dynamic memory available. The available dynamic memory available can be ascertained through the Program Status selection found in the Miscellaneous Functions main menu selection. At least 50kb of memory should be available for use by the program.
- 0161 Invalid Selection Entry!  
An invalid selection has been selected for use of either printers or email selection.
- 0162 Invalid Phone Exchange!  
An attempt to enter a telephone exchange number that is not in the master Telephone Exchange List has been made. Re-enter the exchange make the entry in the master telephone exchange number. This check of proper exchange numbers may be disabled in Define Operational Modes.
- 0163 Dual Server's Files Not Present!  
An attempt has been made to operate a Dual Server system yet the alternate server's main data base file (acctfile.dat) cannot be found. Possibly, the alternate system is faulty or an incorrect drive/path specification (e.g. F:\SIMSII) is in effect. This information is defined in the Define Disk/Network Parameters menu selection.
- 0164 Alternate Drive's Files Not Present!  
An attempt has been made to operate a Alternate Drive system yet the alternate drive's main database file (acctfile.dat) cannot be found. Possibly, the alternate system is faulty or an incorrect drive/path specification (e.g. F:\SIMSII) is in effect. This information is defined in the Define Disk/Network Parameters menu selection.
- 0165 SIMS II Acntfile is Full!  
The account capacity of this SIMS II has been reached and no further accounts can be entered. Please contact SIMS during normal business hours to increase your account capacity.

SIMS, Inc.  
2801 West Parker Road (Suite #5)  
Plano, Texas 75023  
Voice (972) 769-0900  
Fax (972) 612-2440

## SIMS III for Windows – Error Messages (cont.)

0166 SIMS II Account Zones are Full!

The zone capacity of this SIMS II has been reached and no further zones can be entered. Please contact SIMS during normal business hours to increase your zone capacity.

SIMS, Inc.  
2801 West Parker Road (Suite #5)  
Plano, Texas 75023  
Voice (972) 769-0900  
Fax (972) 612-2440

0167 SIMS II Account Contacts are Full!

The contact capacity of this SIMS II has been reached and no further contacts can be entered. Please contact SIMS during normal business hours to increase your contact capacity.

SIMS, Inc.  
2801 West Parker Road (Suite #5)  
Plano, Texas 75023  
Voice (972) 769-0900  
Fax (972) 612-2440

0168 Alternate/Redundant System Error!

An error has been detected while opening a file on the Alternate Drive or Server. This error has caused the SIMS II software to disconnect the alternate data storage. You should first determine the cause of this error (network cable, drive/computer failure, etc.) before re-enabling the Alternate/Dual Server selections. If a prolonged outage is necessary it may be necessary to rebalance the alternate storage. Please consult your System Operations Procedures or contact SIMS if necessary!

0169 Alternate/Redundant System Error!

An error has been detected while closing a file on the Alternate Drive or Server. This error has caused the SIMS II software to disconnect the alternate data storage. You should first determine the cause of this error (network cable, drive/computer failure, etc.) before re-enabling the Alternate/Dual Server selections. If a prolonged outage is necessary it may be necessary to rebalance the alternate storage. Please consult your System Operations Procedures or contact SIMS if necessary!

0170 Alternate/Redundant System Error!

An error has been detected while writing a file on the Alternate Drive or Server. This error has caused the SIMS II software to disconnect the alternate data storage. You should first determine the cause of this error (network cable, drive/computer failure, etc.) before re-enabling the Alternate/Dual Server selections. If a prolonged outage is necessary it may be necessary to rebalance the alternate storage. Please consult your System Operations Procedures or contact SIMS if necessary!

## SIMS III for Windows – Error Messages (cont.)



- 0171 **Alternate/Redundant System Error!**  
An error has been detected while moving a file on the Alternate Drive or Server. This error has caused the SIMS II software to disconnect the alternate data storage. You should first determine the cause of this error (network cable, drive/computer failure, etc.) before re-enabling the Alternate/Dual Server selections. If a prolonged outage is necessary it may be necessary to rebalance the alternate storage. Please consult your System Operations Procedures or contact SIMS if necessary!
- 0172 **Alternate/Redundant System Error!**  
An error has been detected while making a file on the Alternate Drive or Server. This error has caused the SIMS II software to disconnect the alternate data storage. You should first determine the cause of this error (network cable, drive/computer failure, etc) before re-enabling the Alternate/Dual Server selections. If a prolonged outage is necessary it may be necessary to rebalance the alternate storage. Please consult your System Operations Procedures or contact SIMS if necessary.
- 0173 **Warning! Database Has Been Changed!**  
You have requested an exit from Account Maintenance after database changes have been added. A second Escape Key after this warning message will exit from Account Maintenance. Database changes will not be saved.
- 0174 **Requires Yes or No Response!**  
This field requires a “Y”, “N”, “F”, “P” or “B” response to be entered.
- 0175 **Modem Not Responding!**  
Information has been sent to the modem and it is not responding. If the modem is an external type confirm that power is applied to the modem and that the cable is connected. If the problem persists contact your hardware representative.
- 0176 **Modem Not Enabled!**  
A Modem has not been enabled. Automatic dialing cannot therefore take place. A Modem is enabled in the "Modem and Receiver Selection" function found in the System Parameters Menu. Initialization commands for the Modem are entered in the "Auto Dial Modem" selection also found in the System Parameters Menu.
- 0177 **Invalid Global Name!**  
The Global Phone Number entry does not have a match within the Global Phone Number's table. It is recommended to select the Global entries using the window presented when the <F2> key is utilized.
- 0178 (blank)

## SIMS III for Windows – Error Messages (cont.)

- 0179 (blank)
- 0180 Desired Language Overlay Not Present!  
A language has been selected and the program overlay for that language is not present.
- | Language        | Filename    |
|-----------------|-------------|
| Canadian French | cfrench ovr |
| English         | english ovr |
| Spanish         | spanish ovr |
- 0181 Account Being Edited!  
The selected account is currently being edited by another terminal. Wait a short time and attempt the operation again.
- 0182 Out of Service in Use!  
Another terminal is currently viewing, editing or updating Out of Service information. Wait a short time and attempt the operation again.
- 0183 Operator Information in Use!  
Another terminal is currently viewing, editing or updating operator information. Wait a short time and attempt the operation again.
- 0184 History File Error!  
After a prolonged time the system is unable to place a lock on the subscriber history file. If the error continues all terminals should exit the program and the system should be reset. If after resetting the system the error continues contact your supervisor immediately.
- 0185 Global Phone Number File in Use!  
Another terminal is currently viewing, editing or updating Global Number information. Wait a short time and attempt the operation again.
- 0186 Service File Error!  
After a prolonged time the system is unable to place a lock on the pending service work orders file. If the error continues all terminals should exit the program and the system should be reset. If after resetting the system the error continues contact your supervisor immediately.
- 0187 Traffic File Error!  
After a prolonged time the system is unable to remove an event from the Traffic Display file for further processing. If the error continues all terminals should exit the program and the system should be reset. If after resetting the system the error continues contact your supervisor immediately.

## SIMS III for Windows – Error Messages (cont.)

- 0188 Traffic File Error!  
After a prolonged time the system is unable to return an event to the Traffic Display file for further processing. If the error continues all terminals should exit the program and the system should be reset. If after resetting the system the error continues contact your supervisor immediately.
- 0189 Traffic File Error!  
After a prolonged time the system is unable to fetch an event from the Traffic Display file for further processing. If the error continues all terminals should exit the program and the system should be reset. If after resetting the system the error continues contact your supervisor immediately.
- 0190 Invalid Account Number  
The number entered is invalid. The probable cause is an invalid character entry.
- 0191 Account Currently Being Edited!  
You are trying to complete an action mask when the account is currently being locked by another workstation.
- 0192 Receiver Buffer Overflow Error!  
The required data buffers for the specified receivers cannot be met and some receivers may not be enabled. Please consult SIMS, Inc. for the problem correction.
- 0193 Traffic File Error!  
After a prolonged time the system is unable to insert an event into the Traffic Display file. If the error continues all terminals should exit the program and the system should be reset. If after resetting the system the error continues contact your supervisor immediately.

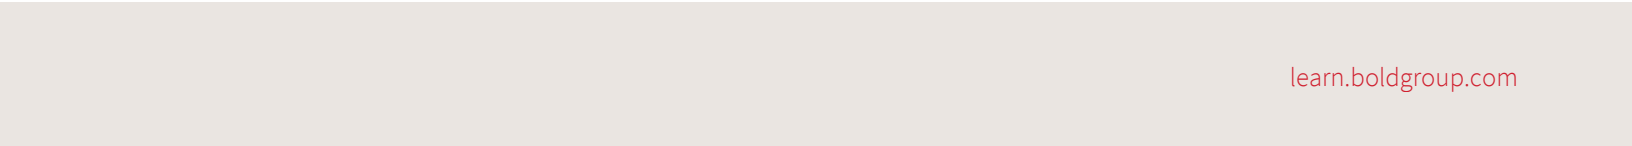

## SIMS III for Windows – Error Messages (cont.)

- 0194 File Error!  
After a prolonged time the system is unable to write zone or responsible person information to the appropriate files. If the error continues all terminals should exit the program and the system should be reset. If after resetting the system the error continues contact your supervisor immediately.
- 0195 Lock Timeout on Account File!  
After a prolonged time the system is unable to write account database information to the appropriate file. If the error continues all terminals should exit the program and the system should be reset. If after resetting the system the error continues contact your supervisor immediately.
- 0196 File Currently in Use!  
This file is currently in use by another SIMS II User and has been locked for further use.
- 0197 Write Record /w NSlot <=PSlot  
The current record being written has a next slot index less than or equal to the previous slot index.
- 0198 Write Record /w NSlot <= CurSlt  
The current record being written has a next slot index less than or equal to the current slot index.
- 0199 Write Record /w PSlot >=CurSlt  
The current record being written has a previous slot value greater than or equal to the current record being written.
- 0200 Delays Pending!  
A request to exit the program with Alarm and Cancel, Entry and Exit or Restore events pending are still being process has been attempted. If you continue and exit the program these signals will be lost and you will manually need to check them after returning to the program.
- 0201 Blank Line Present!  
A blank line is currently present in the list of entries. You must either enter data in this field or delete the blank line by moving the cursor to its position and strike <F4> to remove it.
- 0202 Write Record Pointer Move  
Error was detected on pointer move during a write record.
- 0203 Record Already in Use!  
An attempt was made to write to a record that was already used by an account other than the one specified.

## SIMS III for Windows – Error Messages (cont.)

- 0204 Subscriber Web Access Error!  
Valid selections for Subscriber Web Access are "Y", "N" and numerics "1" through "9". A "Y" allows complete access and capabilities of data entry during Web Access. numerics "1" through "9" will allow SIMSWeb to look for operator Logins of WB1 through WB9.
- 0205 Incorrect Index on Account Fetch!  
After searching the database index file an entry was found for the account however, the position the index file pointed to in the database file did not have information for that account. Probably a file regeneration will correct the error, however you may wish to call SIMS, Inc. before pursuing this course.
- 0206 Global Schedule in Use!  
Another terminal is currently viewing, editing or updating the Global Schedules information. Wait a short time and attempt the operation again.
- 0207 Traffic File Error!  
An error has occurred while attempting to update the information seen in the Traffic Display. If the error continues all terminals should exit the program and the system should be reset. If after resetting the system the error continues contact your supervisor immediately.
- 0208 Maximum Number of Entries Input!  
To continue entering zones or responsible party contacts for a new account you must save the information entered thus far by holding down the Control <Ctrl> key and striking "K".
- 0209 Output Command Aborted!  
Too many "Not Acknowledged" signals have been received from the Host Receiver or a "TIMEOUT" has taken place. Your command has not been accepted!
- 0210 Restricted Access in Effect!  
An attempt has been made to access information outside the scope of your designated account group access. Please limit your data requests to only the account group to which you have access. Note that if you are a dealer only your accounts may be viewed or modified and additionally other dealers may only view or modify their own.
- 0211 SIMS II CSEG CheckSum has Changed!  
THE INTEGRITY OF THE SYSTEM HAS BEEN COMPROMISED. WRITE DOWN THE ERROR NUMBER ABOVE, NOTE THE CIRCUMSTANCES WHEN IT OCCURRED AND EXIT THE PROGRAM. THEN RETURN TO THE PROGRAM.  
The software checks itself for internal errors every second. The last check found an error has occurred that could be caused by either a hardware problem or software error. Contact SIMS, Inc. and provide the information noted above.



## SIMS III for Windows – Error Messages (cont.)

- 0212 SIMS II DSEG CheckSum has Changed!  
THE INTEGRITY OF THE SYSTEM HAS BEEN COMPROMISED. WRITE DOWN THE ERROR NUMBER ABOVE, NOTE THE CIRCUMSTANCES WHEN IT OCCURRED AND EXIT THE PROGRAM. THEN RETURN TO THE PROGRAM.  
The software checks itself for internal errors every second. The last check found an error has occurred that could be caused by either a hardware problem or software error. Contact SIMS, Inc. and provide the information noted above.
- 0213 SIMS II DSEG CheckSum has Changed!  
THE INTEGRITY OF THE SYSTEM HAS BEEN COMPROMISED. WRITE DOWN THE ERROR NUMBER ABOVE, NOTE THE CIRCUMSTANCES WHEN IT OCCURRED AND EXIT THE PROGRAM. THEN RETURN TO THE PROGRAM.  
The software checks itself for internal errors every second. The last check found an error has occurred that could be caused by either a hardware problem or software error. Contact SIMS, Inc. and provide the information noted above.
- 0214 SIMS II DSEG CheckSum has Changed!  
THE INTEGRITY OF THE SYSTEM HAS BEEN COMPROMISED. WRITE DOWN THE ERROR NUMBER ABOVE, NOTE THE CIRCUMSTANCES WHEN IT OCCURRED AND EXIT THE PROGRAM. THEN RETURN TO THE PROGRAM.  
The software checks itself for internal errors every second. The last check found an error has occurred that could be caused by either a hardware problem or software error. Contact SIMS, Inc. and provide the information noted above.
- 0215 SIMS II DSEG CheckSum has Changed!  
THE INTEGRITY OF THE SYSTEM HAS BEEN COMPROMISED. WRITE DOWN THE ERROR NUMBER ABOVE, NOTE THE CIRCUMSTANCES WHEN IT OCCURRED AND EXIT THE PROGRAM. THEN RETURN TO THE PROGRAM.  
The software checks itself for internal errors every second. The last check found an error has occurred that could be caused by either a hardware problem or software error. Contact SIMS, Inc. and provide the information noted above.
- 0216 SIMS II HSEG CheckSum has Changed!  
THE INTEGRITY OF THE SYSTEM HAS BEEN COMPROMISED. WRITE DOWN THE ERROR NUMBER ABOVE, NOTE THE CIRCUMSTANCES WHEN IT OCCURRED AND EXIT THE PROGRAM. THEN RETURN TO THE PROGRAM.  
The software checks itself for internal errors every second. The last check found an error has occurred that could be caused by either a hardware problem or software error. Contact SIMS, Inc. and provide the information noted above.

## SIMS III for Windows – Error Messages (cont.)

- 0217 SIMS II DSEG CheckSum has Changed!  
THE INTEGRITY OF THE SYSTEM HAS BEEN COMPROMISED. WRITE DOWN THE ERROR NUMBER ABOVE, NOTE THE CIRCUMSTANCES WHEN IT OCCURRED AND EXIT THE PROGRAM. THEN RETURN TO THE PROGRAM.  
The software checks itself for internal errors every second. The last check found an error has occurred that could be caused by either a hardware problem or software error. Contact SIMS, Inc. and provide the information noted above.
- 0218 SIMS II PSEG CheckSum has Changed!  
THE INTEGRITY OF THE SYSTEM HAS BEEN COMPROMISED. WRITE DOWN THE ERROR NUMBER ABOVE, NOTE THE CIRCUMSTANCES WHEN IT OCCURRED AND EXIT THE PROGRAM. THEN RETURN TO THE PROGRAM.  
The software checks itself for internal errors every second. The last check found an error has occurred that could be caused by either a hardware problem or software error. Contact SIMS, Inc. and provide the information noted above.
- 0219 SIMS II QSEG CheckSum has Changed!  
THE INTEGRITY OF THE SYSTEM HAS BEEN COMPROMISED. WRITE DOWN THE ERROR NUMBER ABOVE, NOTE THE CIRCUMSTANCES WHEN IT OCCURRED AND EXIT THE PROGRAM. THEN RETURN TO THE PROGRAM.  
The software checks itself for internal errors every second. The last check found an error has occurred that could be caused by either a hardware problem or software error. Contact SIMS, Inc. and provide the information noted above.
- 0221 SIMS II HSEG CheckSum has Changed!  
THE INTEGRITY OF THE SYSTEM HAS BEEN COMPROMISED. WRITE DOWN THE ERROR NUMBER ABOVE, NOTE THE CIRCUMSTANCES WHEN IT OCCURRED AND EXIT THE PROGRAM. THEN RETURN TO THE PROGRAM.  
The software checks itself for internal errors every second. The last check found an error has occurred that could be caused by either a hardware problem or software error. Contact SIMS, Inc. and provide the information noted above.
- 0222 SIMS II DSEG CheckSum has Changed!  
THE INTEGRITY OF THE SYSTEM HAS BEEN COMPROMISED. WRITE DOWN THE ERROR NUMBER ABOVE, NOTE THE CIRCUMSTANCES WHEN IT OCCURRED AND EXIT THE PROGRAM. THEN RETURN TO THE PROGRAM.  
The software checks itself for internal errors every second. The last check found an error has occurred that could be caused by either a hardware problem or software error. Contact SIMS, Inc. and provide the information noted above.

## SIMS III for Windows – Error Messages (cont.)

- 0223 SIMS II JSEG CheckSum has Changed!  
THE INTEGRITY OF THE SYSTEM HAS BEEN COMPROMISED. WRITE DOWN THE ERROR NUMBER ABOVE, NOTE THE CIRCUMSTANCES WHEN IT OCCURRED AND EXIT THE PROGRAM. THEN RETURN TO THE PROGRAM.  
The software checks itself for internal errors every second. The last check found an error has occurred that could be caused by either a hardware problem or software error. Contact SIMS, Inc. and provide the information noted above.
- 0224 SIMS II JSEG CheckSum has Changed!  
THE INTEGRITY OF THE SYSTEM HAS BEEN COMPROMISED. WRITE DOWN THE ERROR NUMBER ABOVE, NOTE THE CIRCUMSTANCES WHEN IT OCCURRED AND EXIT THE PROGRAM. THEN RETURN TO THE PROGRAM.  
The software checks itself for internal errors every second. The last check found an error has occurred that could be caused by either a hardware problem or software error. Contact SIMS, Inc. and provide the information noted above.
- 0225 SIMS II IOSEG CheckSum has Changed!  
THE INTEGRITY OF THE SYSTEM HAS BEEN COMPROMISED. WRITE DOWN THE ERROR NUMBER ABOVE, NOTE THE CIRCUMSTANCES WHEN IT OCCURRED AND EXIT THE PROGRAM. THEN RETURN TO THE PROGRAM.  
The software checks itself for internal errors every second. The last check found an error has occurred that could be caused by either a hardware problem or software error. Contact SIMS, Inc. and provide the information noted above.
- 0226 SIMS II IOSEG CheckSum has Changed!  
THE INTEGRITY OF THE SYSTEM HAS BEEN COMPROMISED. WRITE DOWN THE ERROR NUMBER ABOVE, NOTE THE CIRCUMSTANCES WHEN IT OCCURRED AND EXIT THE PROGRAM. THEN RETURN TO THE PROGRAM.  
The software checks itself for internal errors every second. The last check found an error has occurred that could be caused by either a hardware problem or software error. Contact SIMS, Inc. and provide the information noted above.
- 0227 SIMS II IOSEG CheckSum has Changed!  
THE INTEGRITY OF THE SYSTEM HAS BEEN COMPROMISED. WRITE DOWN THE ERROR NUMBER ABOVE, NOTE THE CIRCUMSTANCES WHEN IT OCCURRED AND EXIT THE PROGRAM. THEN RETURN TO THE PROGRAM.  
The software checks itself for internal errors every second. The last check found an error has occurred that could be caused by either a hardware problem or software error. Contact SIMS, Inc. and provide the information noted above.

## SIMS III for Windows – Error Messages (cont.)

- 0228 Traffic File Error!  
After a prolonged time the system was unable to remove an event from the Traffic Display because it couldn't be found. If the error continues all terminals should exit the program and the system should be reset. If after resetting the system the error continues contact your supervisor immediately.
- 0229 Incorrect Identification  
An attempt to complete an exception event without a valid operator identification number has been made.
- 0230 Memory Cannot be Freed!  
The SIMS II cannot return previously allocated memory to the operating system. You should reset the computer if you cannot gracefully exit the program. If after resetting the system the error continues contact your supervisor immediately.
- 0231 Line Insertion Unavailable!  
An attempt to insert a new line cannot be accomplished for one of the following reasons:  
1. Current line is already blank and a double line insertion is not legal.  
2. Current line must be saved before an insertion can be made. Hold down the Control <Ctrl> key and strike "K" to save the information.  
3. Cannot insert at the last line.
- 0232 Account Number in Use!  
An attempt to change the account number to one that already exists has been made. You must use a different account number or first delete the original account before continuing.
- 0233 Memory Cannot be Freed!  
The SIMS II cannot return previously allocated memory to the operating system. You should reset the computer if you cannot gracefully exit the program. If after resetting the system the error continues contact your supervisor immediately.
- 0234 Traffic File Error!  
After a prolonged time the system was unable to remove an event from the Traffic Display. If the error continues all terminals should exit the program and the system should be reset. If after resetting the system the error continues contact your supervisor immediately.
- 0235 Memory Allocation Error!  
An attempt by the program has been made to allocate memory for it's use that was not successful. Possibly the computer's available memory needs to be increased.
- 0236 Unable to Free Allocated Memory!  
An attempt by the program has been made to free memory it had previously allocated.

## SIMS III for Windows – Error Messages (cont.)

- 0237 Source and Destination Mismatch!  
An attempt has been made to perform a search and replace function using a greater number of characters for the destination string than the source string. For example, you cannot search for “1234” and replace it with “123456”.
- 0238 Cannot Open All Files on Acct Update!  
An error has occurred during an account database update. The program could not open all necessary files required when updating database. This could be caused by a “files =” command in your systems config.sys file that does not have a high enough value.
- 0239 Cannot Close All Files on Acct Update!  
An error has occurred during an account database update. The program could not close all necessary files when updating database. This could be caused by a “files =” command in your systems config.sys file that does not have a high enough value.
- 0240 Invalid File Handle on Pointer Move!  
During the action of adjusting a pointer within a file the system has returned a file input/output error. The program will now attempt an error recovery.
- 0241 Error Opening a File!  
While attempting to open a file an error has occurred. The problem may be because the requested file is not present.
- 0242 Error in Attempting to Write a Record!  
An attempt has been made to write a new record into an existing record Slot. This Error should be reported along with all the information about the event.
- 0243 Error in Attempting to Write a Record!  
An attempt has been made to write an existing record into another accounts existing slot. This Error should be reported along with the information about this event.
- 0244 Line Insertion Cannot Be Done!  
The current insertion cannot be done because the buffer is full. If the insertion was allowed the last entry would be lost. If there are blank lines remove them using the F4 key.
- 0245 SIMS II QSEG CheckSum has Changed!  
THE INTEGRITY OF THE SYSTEM HAS BEEN COMPROMISED. WRITE DOWN THE ERROR NUMBER ABOVE, NOTE THE CIRCUMSTANCES WHEN IT OCCURRED AND EXIT THE PROGRAM. THEN RETURN TO THE PROGRAM.  
The software checks itself for internal errors every second. The last check found an error has occurred that could be caused by either a hardware problem or software error. Contact SIMS, Inc. and provide the information noted above.

## SIMS III for Windows – Error Messages (cont.)

- 0246 SIMS II QSEG CheckSum has Changed!  
THE INTEGRITY OF THE SYSTEM HAS BEEN COMPROMISED. WRITE DOWN THE ERROR NUMBER ABOVE, NOTE THE CIRCUMSTANCES WHEN IT OCCURRED AND EXIT THE PROGRAM. THEN RETURN TO THE PROGRAM.  
The software checks itself for internal errors every second. The last check found an error has occurred that could be caused by either a hardware problem or software error. Contact SIMS, Inc. and provide the information noted above.
- 0247 SIMS II QSEG CheckSum has Changed!  
THE INTEGRITY OF THE SYSTEM HAS BEEN COMPROMISED. WRITE DOWN THE ERROR NUMBER ABOVE, NOTE THE CIRCUMSTANCES WHEN IT OCCURRED AND EXIT THE PROGRAM. THEN RETURN TO THE PROGRAM.  
The software checks itself for internal errors every second. The last check found an error has occurred that could be caused by either a hardware problem or software error. Contact SIMS, Inc. and provide the information noted above.
- 0248 SIMS II DSEG CheckSum has Changed!  
THE INTEGRITY OF THE SYSTEM HAS BEEN COMPROMISED. WRITE DOWN THE ERROR NUMBER ABOVE, NOTE THE CIRCUMSTANCES WHEN IT OCCURRED AND EXIT THE PROGRAM. THEN RETURN TO THE PROGRAM.  
The software checks itself for internal errors every second. The last check found an error has occurred that could be caused by either a hardware problem or software error. Contact SIMS, Inc. and provide the information noted above.
- 0249 Can't Link Current Weeks History!  
The current weeks history file must be linked on the terminal identified as the "Primary System". Move to this terminal and retry your link.
- 0250 Can't Rename History File!  
The current weeks history file normally renamed automatically every Sunday at 00:00 hours to Sunday's date (e.g. 12-29-91.HIS) cannot be renamed due to an error. Contact your supervisor immediately with this information.
- 0251 Can't Create History File!  
The program cannot create a new history file for the upcoming week. Possibly the disk is full (check the footer status line "Disk" percentage), and if so, additional space will have to be made available on the disk drive. Contact your supervisor immediately with this information.
- 0252 Can't Rename Index File!  
The current weeks history file index normally renamed automatically every Sunday at 00:00 hours to Sunday's date (e.g. 12-29-91.IDX) cannot be renamed due to an error. Contact your supervisor immediately with this information.

## SIMS III for Windows – Error Messages (cont.)

0253 Information Entry Note Loop for Zones

This error is only written to the SIMSErr.LOG file and will only be written when more than 175 iterations are necessary to find a zone. This very helpful in identifying situations that cause slowness in processing of signals. Keeping these entries to a low value can be done by moving TST, OPN and CLO type signals to the top of the zone accounts.

0254 (blank)

0255 (blank)